


TYPICAL INDICATOR ORDERING EXAMPLE



DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

HB01KW01-5C-CB

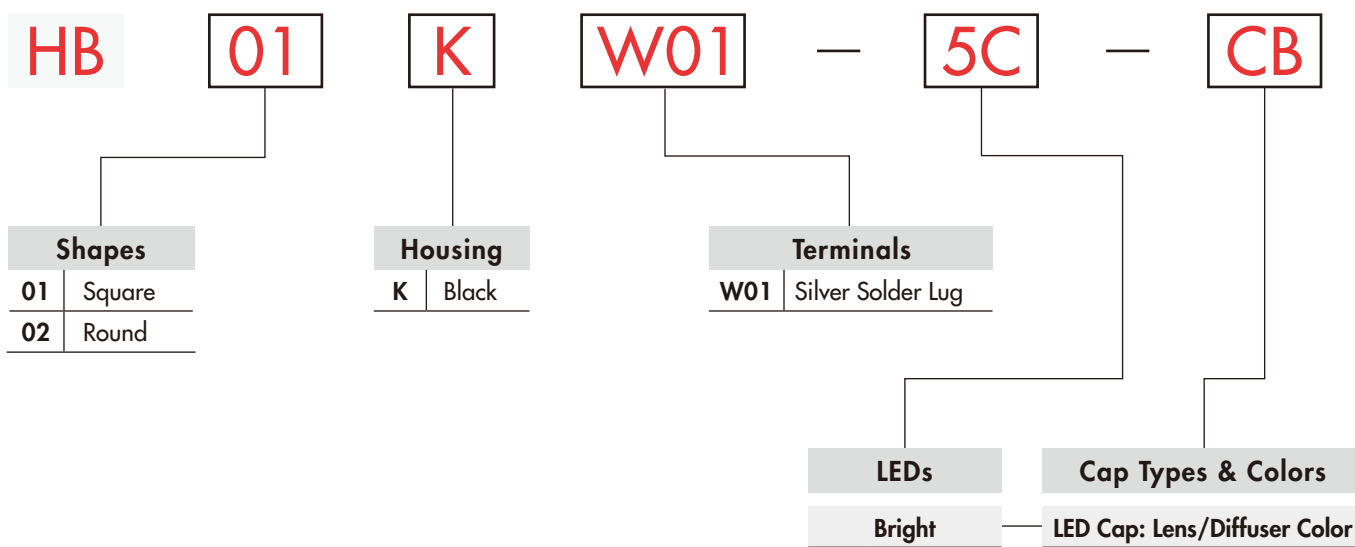

LEDs		Cap Types & Colors	
Bright		LED Cap: Lens/Diffuser Color	
5C	Red	CB	Red/White
5D	Amber	DB	Amber/White
5F	Green	FB	Green/White
		JB	Clear/White
Super Bright		LED Cap: Lens/Diffuser Color	
6B	White	JB	Clear/White
6F	Green		
6G	Blue		

LED COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C. LED circuit is isolated and requires external power source. Single element LED is colored in OFF state. If the source voltage exceeds the rated voltage, a ballast resistor is required. The resistor value can be calculated by using the formula in the Supplement section.

Bright AT633	Note for Super Bright:	Color	Bright			Super Bright			Unit
			5C	5D	5F	6B	6F	6G	
	(+)-[LED]-(-)		Red	Amber	Green	White	Green	Blue	
Super Bright AT624G Blue		I_{FM}	30	30	30	30	30	30	mA
AT629B White		I_F	20	20	20	20	20	20	mA
AT630F Green		V_F	1.95	2.0	2.1	3.3	3.3	3.3	V
		V_{RM}	5	5	5	7	7	7	V
		ΔI_F	0.42	0.42	0.42	0.40	0.40	0.40	mA/°C
T-1 Bi-pin		Ambient Temperature Range	-25° ~ +50°C			-25° ~ +50°C			


CAP TYPES & COLORS

Colored Cap for Bright LEDs



Lens/Diffuser Colors Available:

- CB** Red/White
- DB** Amber/White
- FB** Green/White

AT4168
Square



AT4169
Round



Transparent Colored Lens



Translucent White Diffuser



Colored LED AT633


Material: Polycarbonate Finish: Glossy

White Cap for Bright & Super Bright LEDs



JB Clear Lens/White Diffuser

Material: Polycarbonate
Finish: Glossy

AT4033
Square



AT4034
Round



Transparent Clear Lens






Translucent White Diffuser



Colored LEDs AT624, AT629, AT630, or AT633

TYPICAL INDICATOR DIMENSIONS

Square



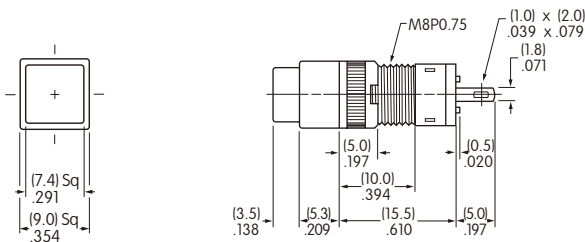


Recommended Panel Thickness: .020" ~ .197" (0.5 ~ 5.0mm)



HB01KW01-5C-CB

Round

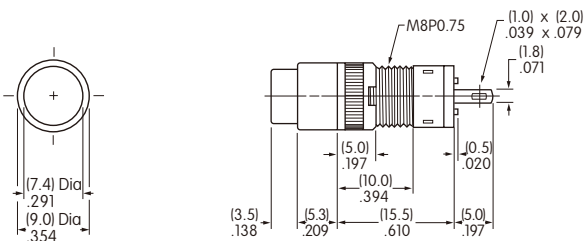

Recommended Panel Thickness: .020" ~ .197" (0.5 ~ 5.0mm)



HB02KW01-5C-CB